



# CIRCULAR ULUS EXPORTPALLET 1200X1000

**Lightweight and especially space-saving, nestable plastic pallet with Euro dimensions.**

The Z-profile in upper deck of the Circular ULUS Exportpallet gives the pallet high flexural rigidity and thus excellent loadability and high carrying capacity. The special design of the feet makes the pallet seamlessly nestable, allowing for space-saving transport when empty. The low net weight of 6 kg also contributes to transport savings. Guaranteed reimbursement when the pallet is presented for recycling.

## BOTTOM SUPPORT




- 9 feet (9F)

Very high compression of empties due to seamless nestability

## DECK OPTIONS



- Open deck (OD)

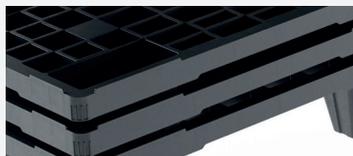


The special cross-sectional Z-profile provides increased flexural rigidity

## TECHNICAL DATA

Bottom support	Top deck	Dimensions (mm)	Load capacities (kg)			Weight (kg)		Pallets per	
			Static	Dynamic	Racking	PE	PO	Stack	Truck
9 feet, nestable	Open	1200 x 1000 x 140	2000	1200	-	6,0	-	56	1456

Entry: 4 ways | Nesting height: 40 mm | Safety rim: 5 mm

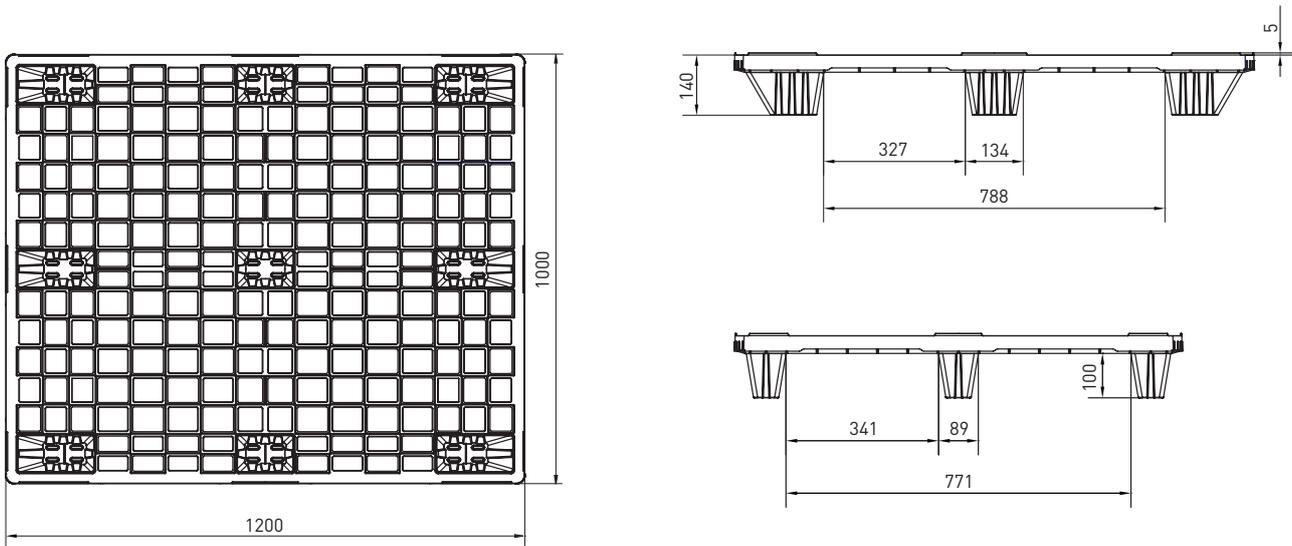

Nominal sizes in mm

## OPTIONS

Color: other colours on request

- Individual marking\*

Anti-slip: Safety rim



Figures can vary depending on the raw material and used and options applied. Guideline values are based both on experience and parts of test ISO B611, which tests with evenly distributed loads at room temperature (20 °C). Varying data may result from different conditions of usage for specific requirements can be identified upon request. Minimum quantity required – PO pallets should only be used and stored in a dry environment. We reserve the right to change any of the stated information without prior notice.